

B125002



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG32#~28#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 125V AC, DC
- ▶ 额定电流 (Current rating) : 1A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 500M\Omega$
- ▶ 耐压 (Withstanding voltage) : 500V AC/minute

材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.15mm	镀锡 Tin-plated




产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

TERMINAL




B125002-4

12507TS-HS



HOUSING

B125002-2

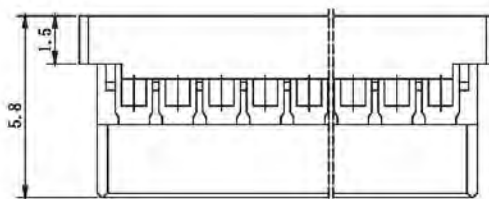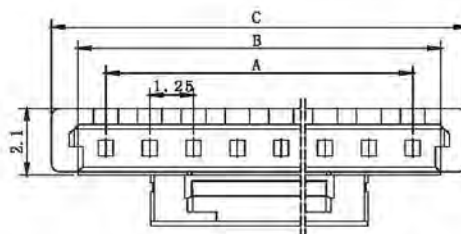

HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm			备注型号 P. S. Type
		A	B	C	
2	B125002-2-02	1.25	2.90	4.50	12507HS-02L
3	B125002-2-03	2.50	4.15	5.75	12507HS-03L
4	B125002-2-04	3.75	5.40	7.00	12507HS-04L
5	B125002-2-05	5.00	6.65	8.25	12507HS-05L
6	B125002-2-06	6.25	7.90	9.50	12507HS-06L
7	B125002-2-07	7.50	9.15	10.75	12507HS-07L
8	B125002-2-08	8.75	10.40	12.00	12507HS-08L
9	B125002-2-09	10.00	11.65	13.25	12507HS-09L
10	B125002-2-10	11.25	12.90	14.50	12507HS-10L
11	B125002-2-11	12.50	14.15	15.75	12507HS-11L
15	B125002-2-15	17.50	19.15	20.75	12507HS-15L